


REV. NO.	DESCRIPTION	DATE
1		
2		

3rd ANGLE PROJECTION

THIS DOCUMENT AND THE DESIGN SHOWN THEREON IS THE PROPERTY OF ROJONE PTY LTD AND MUST NOT BE SOLD, LENT, GIVEN AWAY, COPIED, REPRODUCED OR OTHERWISE DIVULGED TO ANY THIRD PARTY OR USED FOR MANUFACTURE, OR ANY OTHER PURPOSE WITHOUT WRITTEN PERMISSION OF ROJONE PTY LTD.

DO NOT SCALE

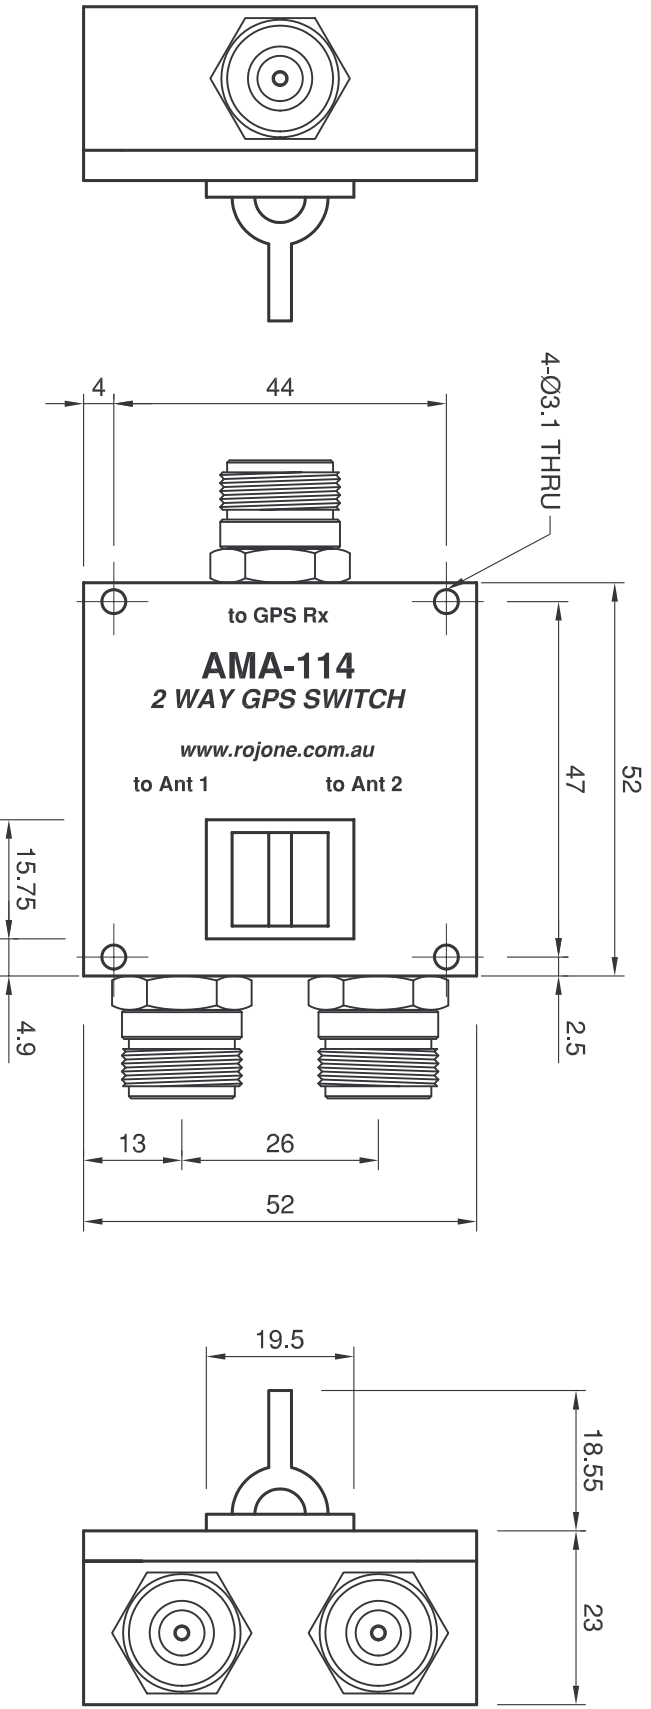

**SPEC**

- Freq: 1 - 2 GHz
- Insertion Loss: 1 dB Typ.
- I/O Return Loss: <15 dB
- Switching Thru DC: 500 mA Max.
- Thru Voltage: 15 V Max.
- ISO: 30 dB Typ.
- Op Temperature: -30 to 50 °C
- Humidity: < 95 %
- Connector: N - F

**Note: Indoor use only.**

UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES (mm)

TOLERANCE: LINEAR  $\pm 0.1$  ANGULAR  $\pm 1^\circ$  REMOVE ALL BURS AND SHARP EDGES



ROJONE PTY LTD ACN 002691241  
 61 AERO RD INGLEBURN 2565  
 STONEY AUSTRALIA  
 Ph: (612) 9829 1555 Fax: (612) 9605 9812  
 Web: www.rojone.com.au E-mail: sales@rojone.com.au

TITLE  
 2 WAY GPS SWITCH  
 AMA-114

MATERIAL ALUMINIUM ALLOY 6160 BODY

DRAWN

Y. GU

DRWG No: 002003250008

FINISH

GREY PAINT

CHECKED

H. JIA

SCALE 1:1 SHEET 1 OF 1

APPROVED B. G.

FILENAME 002002300008BISSA.DWG

A4